



RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)




RECOMMENDED PANEL CUTOUT

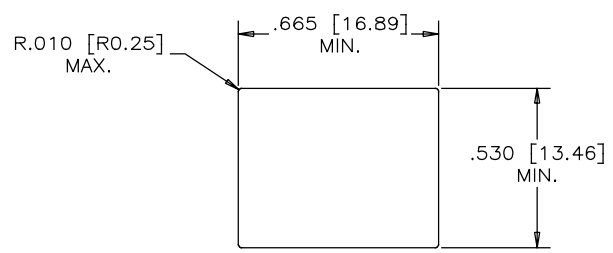

REVISIONS			
SYM	ZONE	ECN, ERN NO.	DATE APPRD.
A		PROPOSAL	JUN27/06 L.CHAN
B		PROPOSAL	MAR27/17 L.CHAN

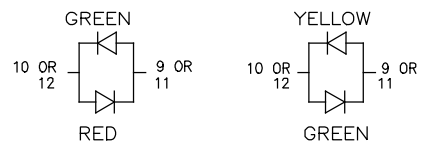

BI-COLOUR LED DETAIL
(RED/YELLOW AND GREEN/ORANGE LED'S ARE ALSO AVAILABLE)

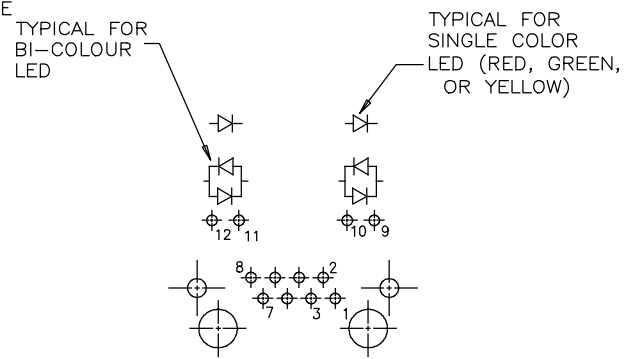

MATERIALS:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0

CONTACTS:

PHOSPHOR BRONZE
PLATING: 6 μ" [0.15 MICRONS]
MIN. GOLD ON MATING SURFACES.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH MATTE TIN PLATING ON SOLDER TAILS.

RECOMMENDED SOLDERING TEMPERATURE:
WAVE SOLDERING AT 260°C MAXIMUM FOR
5 SEC MAXIMUM.

PART NUMBER: RJHSE-E38X

REFER TO LED OPTIONS DRAWING
FOR ORDERING CODES

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION
MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING
PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

DRAWN PAULW	DATE JUN27/06	Amphenol Canada Corp.	
DESIGNED			
CHECKED CHIGOW	DATE JUN27/06	TITLE	
I. E. APPRD.		HIGH SPEED, RJ45, MODULAR JACK, 8 POSITION, 8 CONTACTS, SHIELDED, WITH LEDs - RoHS COMPLIANT	
Q. A. APPRD.		DWG. APPRD.	
ENG. REL. NO.		DWG	DRAWING NO.
REF.		P-RJHSE-E38X	
DIMENSIONS ARE IN INCHES [mm]		SCALE	REV. B
CODE ID. NO. 03554		WT. -----	SURF. -----
		SHEET 7 OF 7	